






PH3 TRIPLE STACKER LIFT




Specifications:

| | |
|--|--|
| Lifting Capacity | Top runway 9,000 lbs / Middle runway 8,000 lbs |
| Length of runway | Middle 165" / Top 205" |
| Length of drive-on approach ramp | Middle 37"/Top 81" |
| Overall length with top ramp down | 286" |
| Overall length with top ramp down but folded | 247" |
| Height of columns (overall height empty) | Middle 81 ¾" / Top 170" |
| Runway width | Middle 18 ¾" / Top 20" |
| Width between runways | Middle 37 ½" / Top 37 ½" |
| Measurement to outside of both runways | Middle 75 ' / Top 76 ½" |
| Clearance between columns | Middle 93" / Top 102" |
| Overall width (with motor) | 114" |
| Overall width (without motor) | 102 ½" |
| Top of Runway - Middle Deck | 72 1/2" |
| Upper Deck | 149" |

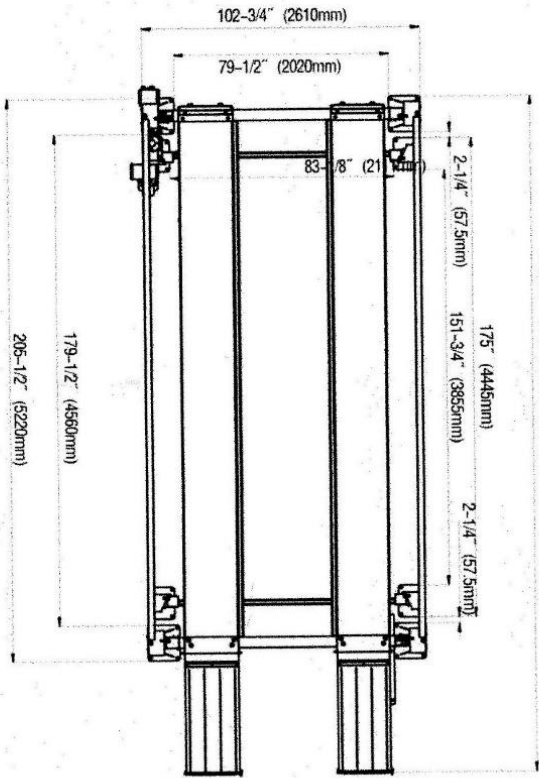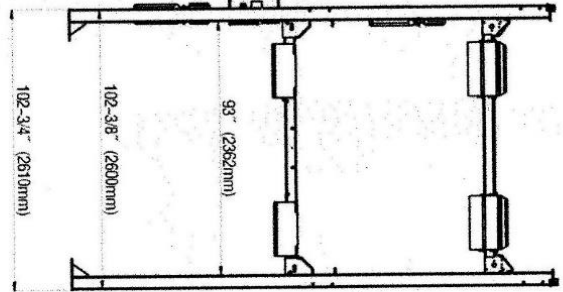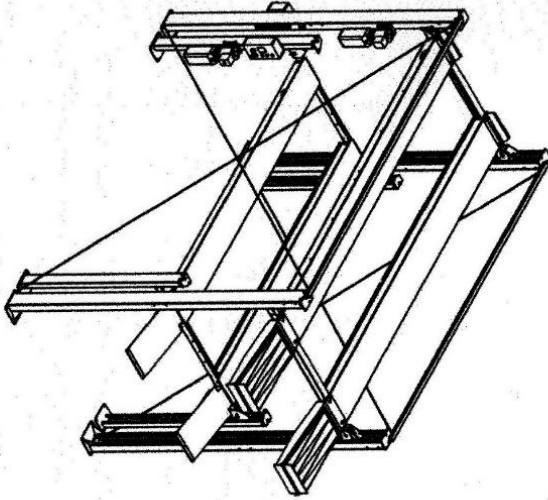


Fold 247" (6274.51mm) - Unfold 286-3/8" (7274.03mm)

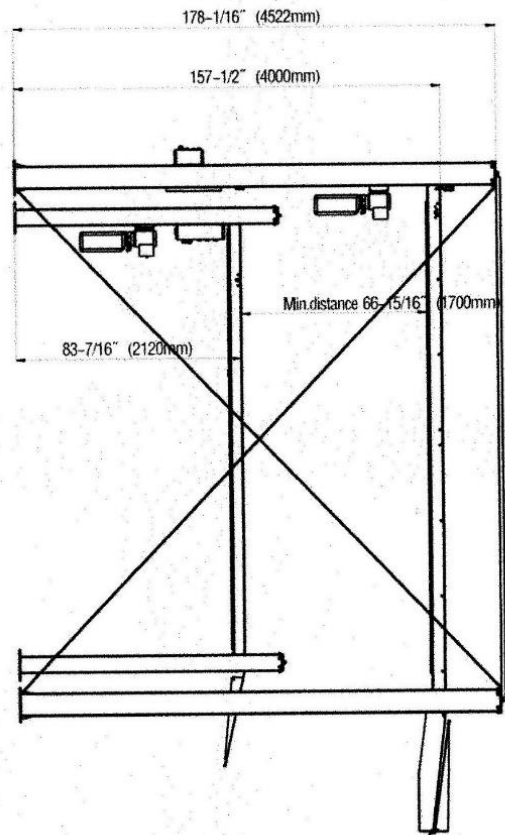



Dual control boxes

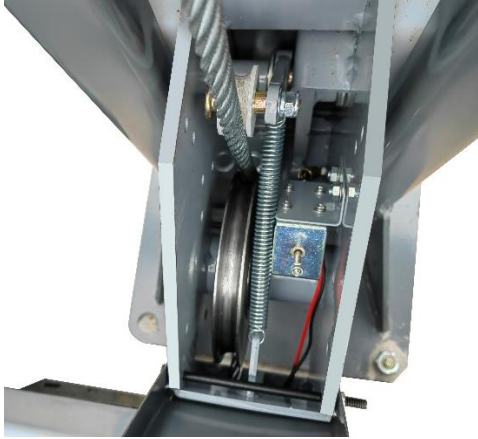

Safety Locks



Upper height limiter



Oil cylinder with explosion-proof valve



Folding drive-on approach ramps